


2 mm LSZH Tube for Bare Fiber Protection

TECHNICAL SPECIFICATION

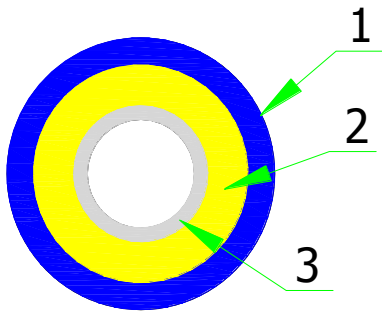

1 Out Jacket

Material : LSZH

External Diameter : 2.0 mm

Internal Diameter : 1.3 mm

Colors on stock: Please consult us


2 Strength Member : Kevlar Yarns

3 Inner Tube :

Material : Polypropylene

External Diameter : 0.85 -0/+0.1 mm

Internal Diameter : 0.60 -0/+ 0.1 mm

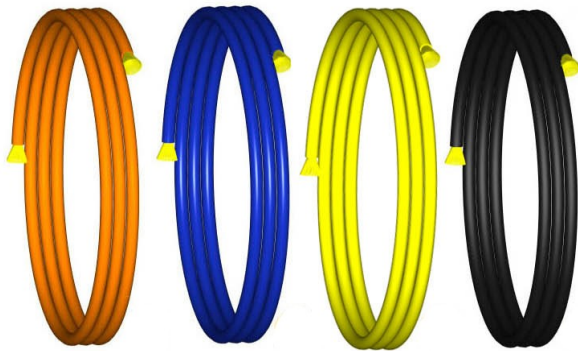

MAIN CHARACTERISTICS

		Values	Test Method
Temperature Range [°C]	Transport & Storage	-30 / +70	IEC 60794-1-F1
	Installation	-5 / +50	
	Operation	-10 / +70	
Minimum Bending Radius [mm]	Static	30	IEC 60794-1-E11
	Dynamic	30	IEC 60794-1-E10
Weight [kg/km]		4	
Cable Reel Length [m]		2000	
Sheath Marking		none	
Max number of fibers inside the tube		1 or 2	